


# Micro-SD card exchange

Before you begin, disconnect PowerDog® from mains.  
Remove the four crosshead screws from the casing.



Pull out the sd-card from the slot.

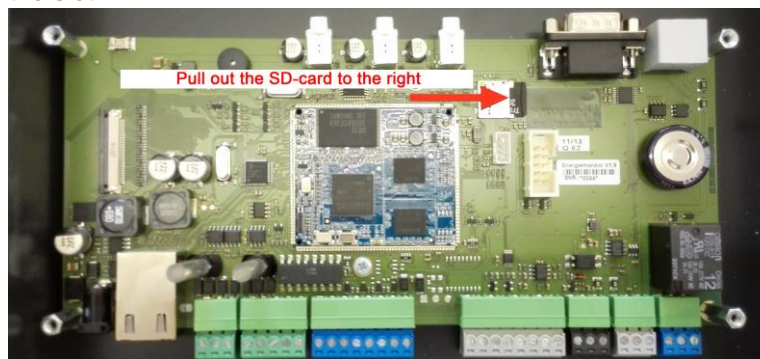

Stick the micro SD-card to a sheet of paper, to prevent a loss of the card when a letter is damaged.

**We need your PowerDog® serial number, name, address, residence, email or telephone number for eventual callbacks and for the return delivery.**

1. When the data is still intact, the configuration and the recorded data are restored and transferred to the new micro SD-card.  
The new SD-card can be connected now without performing any other changes at the PowerDog®.
2. If the data on the SD-card is defective, the config can be transferred manually to the card via the portal.

**The recorded data on the PowerDog® is lost in this case.**

The PowerDog® can be started without performing any changes.

Die recorded old-data is still available on the portal.

„Delete Portal data“ may not be used, because PowerDog® only transfers the data, that is on the PowerDog® to the portal.

3. If no data is on the portal or on the SD-card, a reprogramming of the connected devices on the PowerDog® need to be performed.